


General Information					
Product Model	VTE2000				
Product Name	LCD Ultra-Fast Battery Charger				
Main Advantage	LCD, World, Ultra-Fast- 1 Hour Charger				
Input Voltage	AC100-240V 50-60Hz for worldwide use				
Output Voltage	DC 1.5V				
No. of batteries	1 to 4 pcs AA / AAA				
Battery size	AA / AAA battery				
Battery type	Ni-MH / Ni-Cd Battery				
Charger type	1 to 4 pcs AA / AAA Ni-MH / Ni-Cd batteries				
Charging supervision	4 individually monitored charging channels				
	Channel-independent temperature control and voltage monitor for safe charging.				
	Smart 12 bits Microprocessor to increase rechargeable battery lifespan.				
	Detect by +ΔV, -ΔV, 0ΔV charging curve for 100% fully charge				
	Overtime, overload, overheat , over voltage protection				
	Non-rechargeable battery detection				
Charging supervision	Automatic trickle charge after full charge, CURRENT-50mA				
LCD indicator	Large size LCD display for charging status				
	Charging : Empty battery icon with amber backlight				
	Full charge: Full battery icon				
LCD displays the charging levels	Wrongn battery : Flashing full battery icon				
	1. Empty icon: lower than 30%				
	2. One segment: around 30%				
	3. Two segments: around 60%				
LCD displays the charging levels	4. Full icon: 100%				
					
Input method	US/Euro/UK plug				
Charging current	AA		AAA		
	2000 mAh*1 pcs		1100 mAh * 1pcs		
	1000 mAh *2 pcs		550 mAh *2 pcs		
Charging time	1 pcs	2 pcs	3 pcs	4 pcs	
	2500 mAh	around 1.1 hour	around 2.3 hour	around 3.5 hour	around 4.5 hour
	900 mAh	around 0.8 hour	around 1.5 hour	around 2.3 hour	around 3. hour

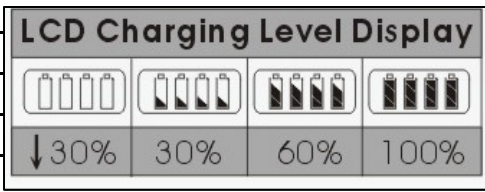